


V330

SKID LOADERS



GEHL®

Capacities		Metric	Imperial
Rated Operating Capacity		1497 kg	3300.32 lbs
Unladen weight		4123 kg	9089.65 lbs
Weight and dimensions			
Overall Operating Height - Fully Raised	h27	4369 mm	14 ft 4 in
Height to Hinge Pin – Fully Raised	h28	3332 mm	10 ft 11.18 in
Overall Height to Top of ROPS	h17	2083 mm	6 ft 10 in
Dump angle at full height	a5	42 °	42 °
Dump height	h29	2502 mm	8 ft 2.50 in
Overall length with bucket	l16	3874 mm	12 ft 8.51 in
Dump reach at full height		813 mm	2 ft 8 in
Rollback at ground		29 °	29 °
Seat to ground height	h30	1041 mm	3 ft 4.98 in
Wheelbase	y	1257 mm	4 ft 1.48 in
Overall width less bucket	b1	1819 mm	5 ft 11.61 in
Bucket Width	e1	1880 mm	6 ft 2.01 in
Ground clearance	m4	229 mm	9.01 in
Overall length - Less Bucket	l2	3023 mm	9 ft 11.01 in
Clearance Radius - Front with Bucket		2400 mm	7 ft 10.48 in
Clearance Circle - Front without Bucket	b19	1422 mm	4 ft 7.98 in
Clearance Circle - Rear	wa1	1765 mm	5 ft 9.48 in
Performances			
Travel Speed with Two-Speed Option - Maximum		20.10 km/h	12.48 mph
Travel speed (unladen)		13.50 km/h	8.38 mph
Wheels			
Standard tyres		14.00x17.5 HD	14.00x17.5 HD
Engine			
Engine brand		Yanmar	Yanmar
Engine model		4TNV98C-NMSLV Stage V	4TNV98C-NMSLV Stage V
Engine norm		Stage V	Stage V
Gross Power (kW)		53.70 kW	53.70 kW
Net Power (kW)		52.70 kW	52.70 kW
Max. torque / Engine rotation		294.20 Nm / 2500 rpm	294.20 Nm / 2500 rpm
Battery		12 V	12 V
Starter (kW)		3 kW	3 kW
Hydraulics			
Standard flow - Auxiliary hydraulics		89 l/min	89 l/min
High-Flow Auxiliary Hydraulics – Option		132 l/min	132 l/min
Tank capacities			
Fuel tank		92.70 l	24.48 US gal
Reservoir Capacity Hydraulics		40 l	10.56 US gal
Displacement		3.30 l	0.87 US gal
Noise and vibration			
Environmental noise (LwA)		101 dB(A)	101 dB(A)
Whole-Body Vibration (ISO 2631-1)		1.07 m/s ²	1.07 m/s ²
Vibration to whole hand/arm		< 1.50 m/s ²	< 1.50 m/s ²

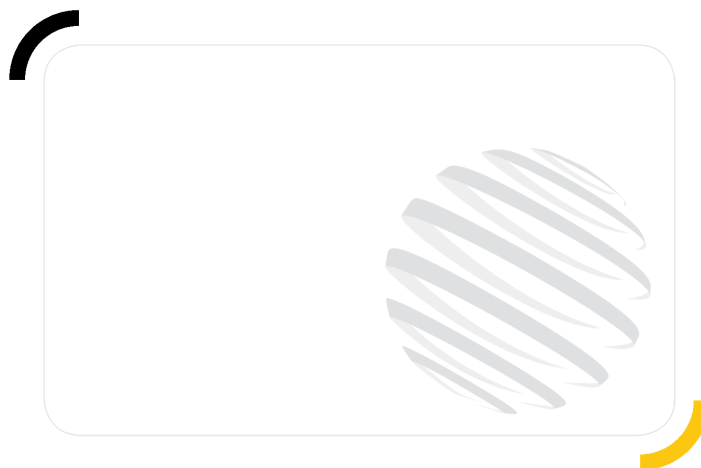

GEHL®

Siège Social
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095
Tel: (262) 334-9461 - Fax: (262) 338-7517
www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend